


HEWLETT-PACKARD

HP-41

USERS' LIBRARY SOLUTIONS

Geometry

Includes barcode for easy software entry.

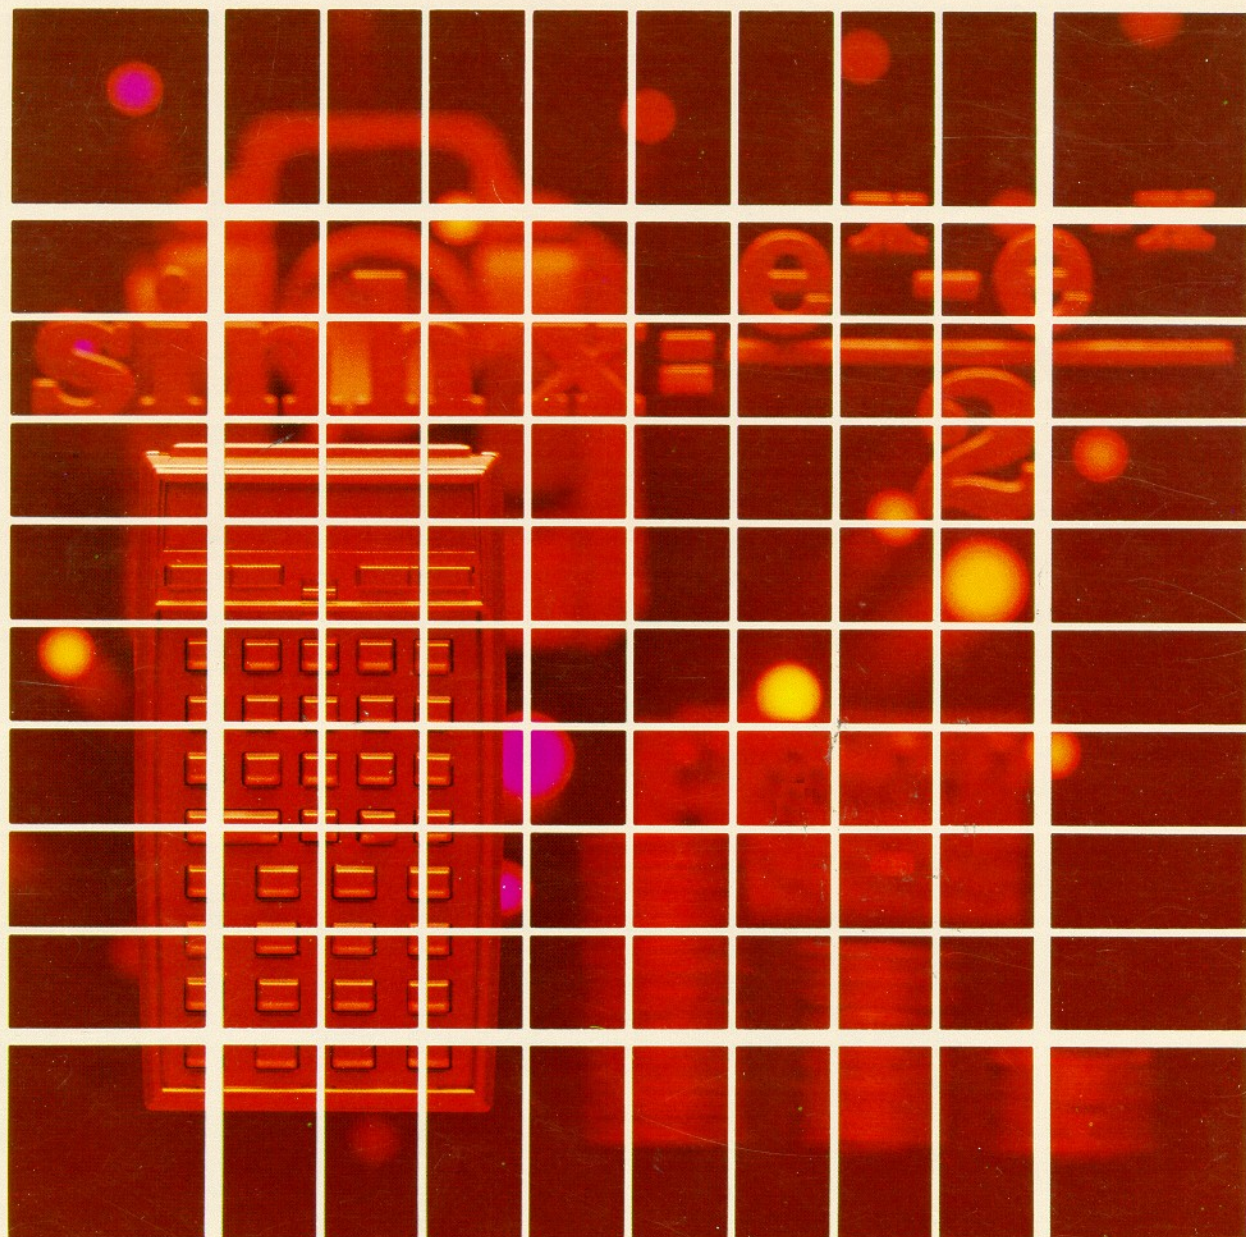

NOTICE

The program material contained herein is supplied without representation or warranty of any kind. Hewlett-Packard Company therefore assumes no responsibility and shall have no liability, consequential or otherwise, of any kind arising from the use of this program material or any part thereof.

INTRODUCTION

This HP-41C Solutions book was written to help you get the most from your calculator. The programs were chosen to provide useful calculations for many of the common problems encountered.

They will provide you with immediate capabilities in your everyday calculations and you will find them useful as guides to programming techniques for writing your own customized software. The comments on each program listing describe the approach used to reach the solution and help you follow the programmer's logic as you become and expert on your HP calculator.

KEYING A PROGRAM INTO THE HP-41C

There are several things that you should keep in mind while you are keying in programs from the program listings provided in this book. The output from the HP 82143A printer provides a convenient way of listing and an easily understood method of keying in programs without showing every keystroke. This type of output is what appears in this handbook. Once you understand the procedure for keying programs in from the printed listings, you will find this method simple and fast. Here is the procedure:

1. At the end of each program listing is a listing of status information required to properly execute that program. Included is the SIZE allocation required. Before you begin keying in the program, press **XEQ** **ALPHA** SIZE **ALPHA** and specify the allocation (three digits; e.g., 10 should be specified as 010).

Also included in the status information is the display format and status of flags important to the program. To ensure proper execution, check to see that the display status of the HP-41C is set as specified and check to see that all applicable flags are set or clear as specified.

2. Set the HP-41C to PRGM mode (press the **PRGM** key) and press **▀** **GTO** **◻** **◻** to prepare the calculator for the new program.

3. Begin keying in the program. Following is a list of hints that will help you when you key in your programs from the program listings in this handbook.

- a. When you see " (quote marks) around a character or group of characters in the program listing, those characters are ALPHA. To key them in, simply press **ALPHA** , key in the characters, then press **ALPHA** again. So "SAMPLE" would be keyed in as **ALPHA** "SAMPLE" **ALPHA** .
- b. The diamond in front of each LBL instruction is only a visual aid to help you locate labels in the program listings. When you key in a program, ignore the diamond.
- c. The printer indication of divide sign is /. When you see / in the program listing, press **+** **◻** .
- d. The printer indication of the multiply sign is ✖ . When you see ✖ in the program listing, press **x** **◻** .
- e. The † character in the program listing is an indication of the **APPEND** function. When you see †, press **▀** **APPEND** in ALPHA mode (press **▀** and the K key).
- f. All operations requiring register addresses accept those addresses in these forms:

nn (a two-digit number)

IND nn (INDIRECT: **▀** , followed by a two-digit number)

X, Y, Z, T, or L (a STACK address: **◻** followed by X, Y, Z, T, or L)

IND X, Y, Z, T or L (INDIRECT stack: **▀** **◻** followed by X, Y, Z, T, or L)

Indirect addresses are specified by pressing **▀** and then the indirect address. Stack addresses are specified by pressing **◻** followed by X, Y, Z, T, or L. Indirect stack addresses are specified by pressing **▀** **◻** and X, Y, Z, T, or L.

Printer Listing

```

01♦LBL "SAM
PLE"
02 "THIS IS
A "
03 "†SAMPLE
"
04 AVIEW
05 6
06 ENTER†
07 -2
08 /
09 ABS
10 STO IND
L
11 "R3="
12 ARCL 03
13 AVIEW
14 RTN
    
```

Keystrokes

```

▀ LBL ALPHA SAMPLE ALPHA
ALPHA THIS IS A ALPHA
ALPHA ▀ APPEND SAMPLE
▀ AVIEW ALPHA
6
ENTER+
2 CHS
+
XEQ ALPHA ABS ALPHA
STO ▀ ◻ L
ALPHA R3= ▀ ARCL 03
▀ AVIEW
ALPHA
▀ RTN
    
```

Display

```

01 LBLT SAMPLE
02T THIS IS A
03T † SAMPLE
04 AVIEW
05 6
06 ENTER /
07 -2
08 /
09 ABS
10 STO IND L
11T R3=
12 ARCL 03
13 AVIEW
14 RTN
    
```

TABLE OF CONTENTS

1. SINE PLATE SOLUTIONS 1
This program, with the aid of commonly available dowel pins and measuring tools (in the case of the sine plate, a sine plate and height blocks), will aid in accurately finding angles and heights for sine plates, position and slope of inclined holes and coordinates of points.
2. V NOTCHES AND LONG RADII 7
This program, together with commonly available dowel pins and height gages, will accurately determine the position and angles of "V" grooves or notches. With the same tools, long radii are accurately calculated.
3. INTERNAL AND EXTERNAL TAPERS 14
This program, used with commonly available dowel pins, height bases, and balls, will accurately determine the position and angle of both external and internal tapers.
4. POINTS OF TANGENCY WITH CIRCLES AND ARCS 23
This program will accurately locate points of tangency between straight lines and arcs, between straight lines and a circle, and between two circles and a straight line.
5. LINE-LINE INTERSECTION 32
This program will calculate the point of intersection of two lines.
6. POINTS ON A STRAIGHT LINE 38
This program calculates the coordinate of equidistant points on a straight line.
7. GRID OF POINTS: CALCULATE ALL POINTS 44
This program calculates the X and Y coordinates of all the points of a grid.
8. GRID OF POINTS: CALCULATE DISCRETE POINTS 50
This program complements "Grid of Points: Calculate All Points". It allows the calculation of specified points of grid.

9. TANGENT CIRCLE TO TWO STRAIGHT LINES WITH A GIVEN RADIUS . . 56

This program calculates the X and Y coordinates of the center of a circle with a given radius tangent to two given straight lines.

10. DISTANCE BETWEEN LINES IN SPACE 64

Given two lines, each defined by any two points, this program calculates the shortest distance between the two lines. (This program was written to determine the clearance between electrical distribution circuits and guy wires or supporting structures).

SINE PLATE SOLUTIONS, COORDINATE OF A POINT, POSITION AND SLOPE OF AN INCLINED HOLE

This program, with the aid of commonly available dowel pins and measuring tools, (and in the case of the sine plate, a sine plate and height blocks), will aid in accurately finding angles and heights for sine plates, position and slope of inclined holes and coordinates of points. All angular output is in decimal degrees.

Solution for Finding Coordinates of a Point:

Given: a , b , d and e , determine x and y


$$c = d^2 + e^2$$

$$\cos \alpha = \frac{b^2 + c^2 - a^2}{2bc}$$

$$\tan \theta = \frac{e}{d}$$

$$x = b \cos (\alpha + \theta)$$

$$y = b \sin (\alpha + \theta)$$

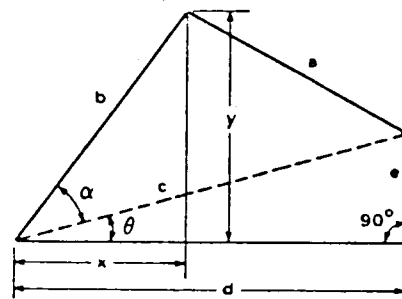


Solution for Finding the Location and Angle of an Inclined Hole:

Given: a , b , r_1 , and d_2 , determine θ and x

$$\sin \theta = \frac{2r_1 + d_2}{a_1 - b_1}$$


$$x = \frac{1}{2}(a_1 + b_1) + r_1 \cot \theta$$



Interchangeable Solutions for Work with a Sine Bar:

Given: e and k , determine α

$$\sin \alpha = \frac{e}{k}$$

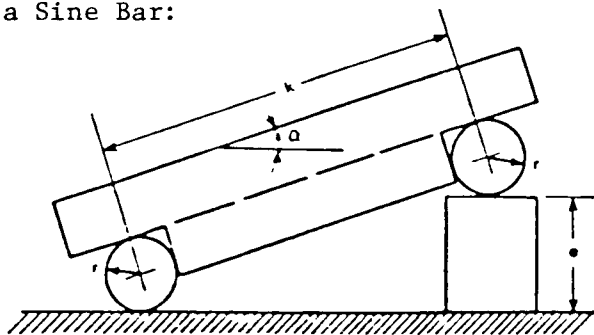

Example:

Given: $a = 1.630''$
 $b = .260''$

$r_1 = .200''$
 $d_2 = .4375''$

Find θ , x of an inclined hole.

Keystrokes:

[shift] [fix] 4
 [XEQ] [ALPHA] SIZE [ALPHA] 003
 [XEQ] [ALPHA] SINP [ALPHA]
 [B]
 .2 [R/S]
 .4375 [R/S]
 1.63 [R/S]
 .26 [R/S]
 [R/S]

Display:

(set display mode)
 SINE PLATE
 R1 ?
 d2 ?
 a?
 b?
 THETA=59.7007
 X=1.0619

User Instructions

SIZE: 003

STEP	INSTRUCTIONS	INPUT	FUNCTION	DISPLAY
1	Key in the program and set display mode			
2	Initialize the program.		[XEQ] SINP	SINE PLATE
3	To solve for the coordinates of a point:		[A]	a?
	Input a	a	[R/S]	b?
	b	b	[R/S]	d?
	d	d	[R/S]	e?
	and e.	e	[R/S]	X=(x)
			[R/S]	Y=(y)
4	To solve for the location and angle of an			
	inclined hole.		[B]	R1 ?
	Input r ₁	r ₁	[R/S]	d2 ?
	d ₂	d ₂	[R/S]	a?
	a	a	[R/S]	b?
	and b.	b	[R/S]	THETA=(θ)
			[R/S]	X=(x)
5	To solve for angles with a sine bar:		[C]	e?
	Input e	e	[R/S]	K?
	and K.	K	[R/S]	ALPHA=(α)
6	To solve for heights (of blocks) with a			
	sine bar:		[D]	K?
	Input K	K	[R/S]	ALPHA?
	and α.	α	[R/S]	e=(e)

Program Listings

01♦LBL "SIN P"		50 *	
02 SF 21	Initialize	51 "d2 ?"	
03 SF 27		52 PROMPT	
04 DEG		53 +	
05 "SINE PL ATE"		54 "a?"	
06 AVIEW		55 PROMPT	
07♦LBL A	Input a, b, d, and e	56 RCL 00	
08 "a?"		57 -	
09 PROMPT		58 STO 01	
10 X↑2	Calculate x,y	59 "b?"	
11 "b?"		60 PROMPT	
12 PROMPT		61 RCL 00	
13 STO 00		62 +	
14 X↑2		63 ST+ 01	
15 -		64 -	
16 "d?"		65 /	
17 PROMPT		66 ASIN	
18 "e?"		67 "THETA"	
19 PROMPT		68 GTO 11	
20 X<>Y		69 TAN	
21 R-P		70 1/X	
22 STO 01		71 RCL 00	
23 X<>Y		72 *	
24 STO 02		73 RCL 01	
25 RDN		74 2	
26 X↑2		75 /	
27 -		76 +	
28 CHS		77 "X"	
29 RCL 00		78 XEQ 11	
30 /		79♦LBL C	Input e, k Calculate α
31 RCL 01		80 "e?"	
32 /		81 PROMPT	
33 2		82 "K?"	
34 /		83 PROMPT	
35 ACOS		84 /	
36 RCL 02		85 ASIN	
37 +		86 "ALPHA"	
38 RCL 00		87 GTO 11	
39 P-R		88♦LBL D	Input α, k Calculate e
40 "X"		89 "K?"	
41 XEQ 11		90 PROMPT	
42 RDN		91 "ALPHA?"	
43 "Y"		92 PROMPT	
44 GTO 11		93 SIN	
45♦LBL B	Input r ₁ , d ₂ , a, b	94 *	
46 "R1 ?"		95 "e"	
47 PROMPT		96♦LBL 11	Display routine
48 STO 00	Calculate θ, x	97 "t="	
49 2		98 ARCL X	
		99 AVIEW	
		100 END	

REGISTERS, STATUS, FLAGS, ASSIGNMENTS

DATA REGISTERS			STATUS				
00	b or r ₁ c or a ₁ , a ₁ + b ₁ θ	50	SIZE	003	TOT. REG.	29	USER MODE
			ENG		FIX		ON <input checked="" type="checkbox"/> OFF
			DEG	<input checked="" type="checkbox"/>	RAD		GRAD
05		55	FLAGS				
			#	INIT S/C	SET INDICATES	CLEAR INDICATES	
			21	S	Printer enable	Printer disable	
			27	S	User mode on	User mode off	
10		60					
15		65					
20		70					
25		75					
30		80					
35		85					
			ASSIGNMENTS				
			FUNCTION		KEY	FUNCTION	
40		90	Solve for coord	A	Sine bar angles	C	
			Inclined hole	B	Sine bar height	D	
45		95					

SINE PLATE SOLUTIONS

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

PROGRAM REGISTERS NEEDED: 26

ROW 1 (1 : 4)



ROW 2 (5 : 7)



ROW 3 (7 : 15)



ROW 4 (16 : 24)



ROW 5 (25 : 37)



ROW 6 (38 : 45)



ROW 7 (45 : 51)



ROW 8 (51 : 59)



ROW 9 (59 : 67)



ROW 10 (67 : 77)



ROW 11 (77 : 82)



ROW 12 (83 : 88)



ROW 13 (89 : 93)



ROW 14 (94 : 100)



V NOTCHES AND LONG RADII

This program, together with commonly available dowel pins and height gages, will accurately determine the position and angles of "V" grooves or notches. With the same tools, long radii are accurately measured. All angular output is in decimal degrees.

Given: a, b, c, d, r_1 and r_2 , determine x, y, α and β :

$$\tan \phi = \frac{b_1 - a_1}{d_1 - c_1}$$

$$\overline{O_1 O_2} = \frac{d_1 - c_1}{\cos \phi}$$

$$\sin \theta = \frac{r_2 - r_1}{\overline{O_1 O_2}}$$


$$\overline{O O_1} = \frac{r_1}{\sin \theta}$$

$$x = a_1 - \overline{O O_1} \sin \phi$$

$$y = c_1 - \overline{O O_1} \cos \phi$$

$$\alpha = 90^\circ + \phi - \theta$$


$$\beta = 90^\circ - \phi - \theta$$

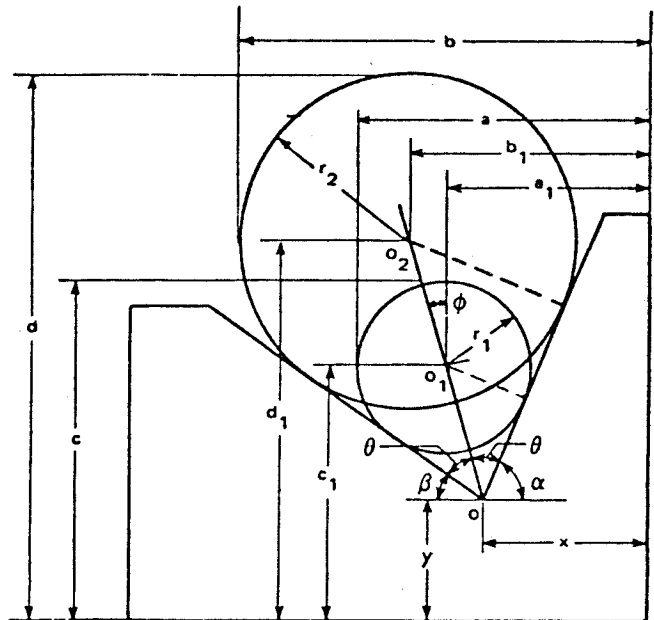

Given: L, r and h , determine R :

$$(R + r)^2 = (R + h - r)^2 + \left(\frac{1}{2}\right) L^2$$


$$R = \frac{L^2}{8(2r - h)} - \frac{h}{2}$$

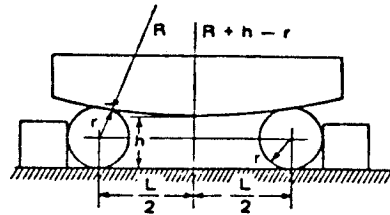

Given L, r and h , determine R :

$$(R - r)^2 = (R - h_1 + r)^2 + \left(\frac{1}{2}\right) L^2$$

$$R = \frac{L^2}{8(h_1 - 2r)} + \frac{h_1}{2}$$



Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

8

Example 1:

For Long Radius (concave arc)

L = 1.000''
r = .15625''
h = .270''

Keystrokes:

[USER]
[XEQ] [ALPHA] SIZE [ALPHA] 006
[XEQ] [ALPHA] VNOTCH [ALPHA]
[B]
1 [R/S]
.15625 [R/S]
.27 [R/S]

Display:

(set USER mode)

V NOTCHES, L.R.
L?
R?
H?
R=2.8062

Example 2:

For "V" Notch

a = 1.500'' d = 2.800''
b = 2.125'' r₁ = .4375''
c = 1.750'' r₂ = .875''

Keystrokes:

[A]
.875 [R/S]
.4375 [R/S]
1.5 [R/S]
2.125 [R/S]
1.75 [R/S]
2.8 [R/S]
[R/S]
[R/S]
[R/S]

Display:

R2?
R1?
a?
b?
c?
d?
X=0.8750
Y=0.7000
ALPHA=63.9420
BETA=29.9010

Program Listings

<pre> 01+LBL "VNO TCH" 02 CF 00 03 "V NOTCH ES, L.R." 04 AVIEW 05 STOP </pre>	Initialize	<pre> 50 STO 02 51 "b?" 52 PROMPT 53 RCL 00 54 - 55 - </pre>	Calculate x, y, α , β
<pre> 06+LBL C 07 SF 00 08+LBL B 09 "L?" 10 PROMPT 11 X\uparrow2 12 "R?" 13 PROMPT 14 2 15 * 16 FS? 00 17 CHS 18 "H?" 19 PROMPT 20 FS?C 00 21 CHS 22 STO 00 23 - 24 8 25 * 26 / 27 RCL 00 28 2 29 / 30 - 31 "R" </pre>	Concave arcs	<pre> 56 "c?" 57 PROMPT 58 RCL 01 59 - 60 STO 03 61 "d?" 62 PROMPT 63 RCL 00 64 - 65 - 66 STO 05 67 / 68 ATAN 69 STO 04 70 CLX 71 RCL 05 72 CHS 73 RCL 04 74 COS 75 / 76 RCL 00 77 RCL 01 78 - 79 / 80 1/X 81 ASIN 82 STO 05 83 RCL 04 84 RCL 01 85 LASTX 86 / 87 P-R 88 ST- 03 89 RDN 90 ST- 02 91 RCL 04 92 90 93 RCL 05 94 - 95 + 96 LASTX 97 RCL 04 98 - 99 "X" 100 RCL 02 </pre>	
<pre> 32+LBL 11 33 "T=" 34 ARCL X 35 AVIEW 36 STOP 37 RTN 38+LBL A 39 "R2?" 40 PROMPT 41 STO 00 42 "R1?" 43 PROMPT 44 STO 01 45 - 46 "a?" 47 PROMPT 48 LASTX 49 - </pre>	Input L, r, h		
	Calculate R		
	Display routine		
	Input a, b, c, d, r ₁ , and r ₂		
			Display results

Program Listings

101 XEQ 11		51	
102 "Y"			
103 RCL 03			
104 XEQ 11			
105 "ALPHA"			
106 RCL T			
107 XEQ 11			
108 "BETA"			
109 RCL T			
110 XEQ 11		60	
111 .END.			
20		70	
30		80	
40		90	
50		00	

REGISTERS, STATUS, FLAGS, ASSIGNMENTS

DATA REGISTERS			STATUS				
00	r_2 or $\pm h$	50	SIZE	006	TOT. REG.	33	USER MODE
	r_1		ENG		FIX		ON <input checked="" type="checkbox"/> OFF
	a_1, x		DEG	<input checked="" type="checkbox"/>	RAD		GRAD
	c_1, y		FLAGS # INIT S/C SET INDICATES CLEAR INDICATES				
05	ϕ	55					
	$c_1 - d_1, \theta$						
10		60					
15		65					
20		70					
25		75					
30		80					
35		85					
			ASSIGNMENTS FUNCTION KEY FUNCTION KEY				
40		90					
45		95					

V NOTCHES AND LONG RADII

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

PROGRAM REGISTERS NEEDED: 28

ROW 1 (1 - 3)



ROW 2 (3 - 3)



ROW 3 (3 - 9)



ROW 4 (10 - 18)



ROW 5 (18 - 29)



ROW 6 (30 - 38)



ROW 7 (38 - 44)



ROW 8 (45 - 53)



ROW 9 (54 - 62)



ROW 10 (63 - 75)



ROW 11 (76 - 88)



ROW 12 (88 - 98)



ROW 13 (99 - 105)



ROW 14 (105 - 108)



ROW 15 (108 - 111)



INTERNAL AND EXTERNAL TAPERS

This program, used with commonly available dowel pins, height bases, and balls, will accurately determine the position and angle of both external and internal tapers. All angular output is in decimal degrees.

Internal Taper:

Given b , c , d , r_1 and r_2 , determine C , D , ϕ and R_1


$$C^2 = 2c(r_1 + r_2) - c^2$$

$$D^2 = 2d(r_1 + r_2) - d^2$$

$$\tan \phi = \frac{D - C}{b}$$

$$2\theta = 90^\circ + \phi$$

$$R_1 = C + r_1 \cot \theta$$

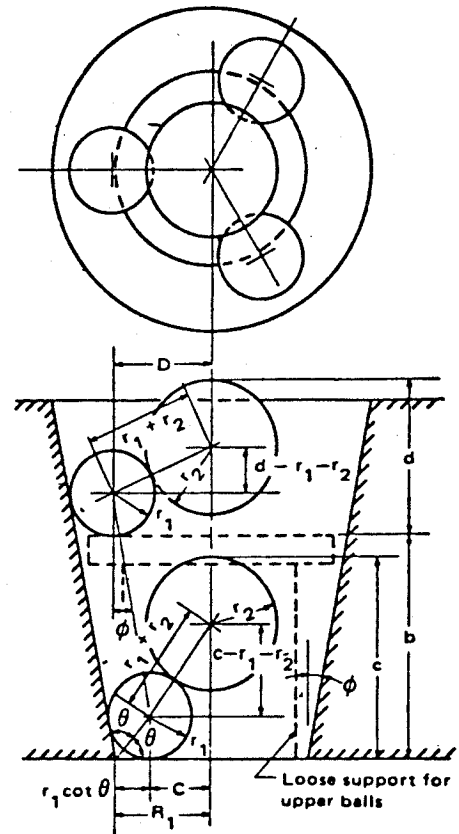


External Taper Case #1:

Given: a , b , r_1 and r_2 , determine x and ϕ

$$\tan \theta = \frac{r_2 - r_1}{b_1 - a_1}$$

$$\phi = 90^\circ - 2\theta$$

$$x = a_1 - r_1 \cot \theta$$

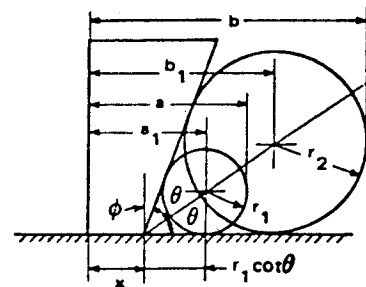


External Taper Case #2:

Given a , b , r and h , determine x and ϕ

$$\tan 2\theta = \frac{h}{b-a}$$

$$\phi = 90 - 2\theta$$

$$x = a - r - r \cot \theta$$

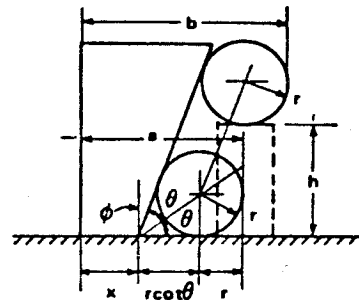


External Taper Case #3:

Given c , d , r_1 and r_2 , determine x and ϕ

$$\sin \phi = \frac{r_2 - r_1}{d_1 - c_1}$$

$$x = \frac{r_1}{\cos \phi} - c_1 \tan \phi$$

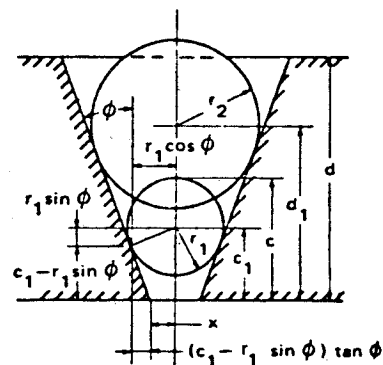

Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

Example:

Internal Taper: Given $b = 1.150''$ $r_1 = .21875''$
 $c = 1.050''$ $r_2 = .34375''$
 $d = .800''$

Keystrokes:

[shift] [fix] 4
[XEQ] [ALPHA] SIZE [ALPHA] 005
[XEQ] [ALPHA] TAPERS [ALPHA]
[A]
.21875 [R/S]
.34375 [R/S]
1.05 [R/S]
.8 [R/S]
1.15 [R/S]
[R/S]
[R/S]
[R/S]

Display:

(set display mode)
IN. ,EX. TAPERS
R1?
R2?
c?
d?
b?
C=0.2806
D=0.5099
PHI=11.2753 (degs)
R1=0.4601

User Instructions

				SIZE: 005
STEP	INSTRUCTIONS	INPUT	FUNCTION	DISPLAY
1	Key in the program and set display mode			
2	Initialize the program.		[XEQ] TAPERS	IN. ,EX. TAPERS
3	Determine the case from the drawings.			
4	For internal taper:		[A]	R1?
		r_1	[R/S]	R2?
		r_2	[R/S]	c?
		c	[R/S]	d?
		d	[R/S]	b?
		b	[R/S]	C=(c)
			[R/S]*	D=(d)
			[R/S]*	PHI=(ϕ)
			[R/S]*	R1=(R1)
5	For an external taper, case 1:		[B]	R1?
		r_1	[R/S]	R2?
		r_2	[R/S]	a?
		a	[R/S]	b?
		b	[R/S]	X=(x)
			[R/S]*	PHI=(ϕ)
6	For an external taper, case 2:		[C]	H?
		h	[R/S]	b?
		b	[R/S]	a?
		a	[R/S]	R?
		r	[R/S]	X=(x)
			[R/S]*	PHI=(ϕ)
7	For an external taper, case 3:		[D]	R1?
		r_1	[R/S]	R2?
		r_2	[R/S]	c?

Program Listings

01♦LBL "TAPERS"		50 RCL 02	
02 CF 01	Initialize	51 "C"	
03 SF 21		52 XEQ 11	
04 SF 27		53 RCL 04	
05 DEG		54 "D"	
06 "IN.,EX.TAPERS"		55 XEQ 11	
07 AVIEW		56 RCL 03	
08 ADV		57 "PHI"	
09 STOP		58 XEQ 11	
10♦LBL A	Internal tapers	59 RCL 02	
11 "R1?"		60 RCL 00	
12 PROMPT		61 +	
13 STO 00	Input r ₁ , r ₂ , c, d and b	62 "R1"	External taper case 1
14 "R2?"		63 GTO 11	
15 PROMPT		64♦LBL B	
16 +		65 "R1?"	Input r ₁ , r ₂ , a and b
17 ST+ X		66 PROMPT	
18 STO 01		67 STO 00	
19 "c?"		68 "R2?"	
20 PROMPT		69 PROMPT	
21 *	Calculate C, D, φ, R1	70 STO 01	
22 LASTX		71 -	
23 X↑2		72 "a?"	Calculate x & φ
24 -		73 FS? 01	
25 SQRT		74 "c?"	
26 STO 02		75 PROMPT	
27 RCL 01		76 RCL 00	
28 "d?"		77 -	
29 PROMPT		78 STO 02	
30 *		79 "b?"	
31 LASTX		80 FS? 01	
32 X↑2		81 "d?"	
33 -		82 PROMPT	
34 SQRT		83 RCL 01	
35 STO 04		84 -	
36 RCL 02		85 -	
37 -		86 /	
38 "b?"		87 FS?C 01	
39 PROMPT		88 RTN	
40 /		89 ATAN	
41 ATAN		90 STO 03	
42 STO 03		91 LASTX	
43 90		92 1/X	
44 +		93 RCL 00	
45 2		94 *	
46 /		95 RCL 02	
47 TAN		96 -	
48 1/X		97 CHS	
49 ST* 00		98 90	
		99 RCL 03	
		100 ST+ X	

Program Listings

101 -		151♦LBL 11	
102 X<>Y		152 "F="	Display routine
103 GTO 05		153 ARCL X	
104♦LBL C	External taper	154 AVIEW	
105 "H?"	case 2	155 END	
106 PROMPT			
107 "b?"			
108 PROMPT			
109 "a?"	Input h, b, a		
110 PROMPT	and r		
111 STO 00			
112 -			
113 /	Calculate x, ϕ		
114 ATAN			
115 STO 01			
116 CHS			
117 90			
118 +			
119 RCL 00			
120 RCL 01			
121 2			
122 /			
123 TAN			
124 1/X			
125 1			
126 +			
127 "R?"			
128 PROMPT			
129 *			
130 -			
131♦LBL 05	Display x, ϕ		
132 "X"			
133 XEQ 11			
134 RDN			
135 "PHI"			
136 GTO 11			
137♦LBL D	External taper		
138 SF 01	case 3		
139 XEQ B			
140 ASIN	Input r ₁ , r ₂ ,		
141 STO 03	c and d		
142 RCL 00			
143 LASTX	Calculate x, ϕ		
144 RCL 02			
145 *			
146 -			
147 RCL 03			
148 COS			
149 /			
150 GTO 05			

REGISTERS, STATUS, FLAGS, ASSIGNMENTS

DATA REGISTERS				STATUS				
00	r_1	} Internal taper	50	SIZE <u>005</u> TOT. REG. <u>41</u>		USER MODE		
	$(r_1 + r_2) * 2$			ENG <u> </u>	FIX <u> </u>	SCI <u> </u>	ON <u>X</u>	OFF <u> </u>
	C			DEG <u>X</u>	RAD <u> </u>	GRAD <u> </u>		
	D							
	$\tan \phi$			FLAGS # INIT S/C SET INDICATES CLEAR INDICATES				
00	r_1	55	01					C
	r_2	} External taper, case 1	21	S	Printer enable	Printer disable		
	$a - r_1$			27	S	User mode on	User mode off	
	θ							
		60						
00	a	} External taper, case 2						
	2θ							
00	r_1	} External taper, case 3	65					
	r_2							
	$c - r_1$							
	ϕ							
20			70					
25			75					
30			80					
35			85					
				ASSIGNMENTS FUNCTION KEY FUNCTION KEY				
40			90					
45			95					

INTERNAL AND EXTERNAL TAPERS

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

PROGRAM REGISTERS NEEDED: 37

ROW 1 (1 : 3)



ROW 2 (3 : 6)



ROW 3 (6 : 11)



ROW 4 (11 : 18)



ROW 5 (19 : 28)



ROW 6 (28 : 38)



ROW 7 (39 : 49)



ROW 8 (50 : 56)



ROW 9 (57 : 62)



ROW 10 (63 : 68)



ROW 11 (68 : 75)



ROW 12 (76 : 83)



ROW 13 (84 : 95)



ROW 14 (96 : 104)



ROW 15 (105 : 111)



ROW 16 (112 : 123)



ROW 17 (124 : 133)



ROW 18 (133 : 138)



INTERNAL AND EXTERNAL TAPERS

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

ROW 19 (139 : 149)



ROW 20 (150 : 155)



POINTS OF TANGENCY WITH CIRCLES AND ARCS

This program will accurately locate points of tangency between straight lines and arcs, between straight lines and a circle, and between two circles and a straight line. All angular outputs are in decimal degrees.

Solutions for Finding Point of Tangency With an Arc:


Given: a and r , determine x and y

$$b^2 = (a + r)^2 - r^2$$

$$\sin \theta = \frac{r}{a + r} = \frac{y}{b} = \frac{x}{r}$$

$$x = \frac{r^2}{a + r}$$

$$y = \frac{br}{a + r}$$

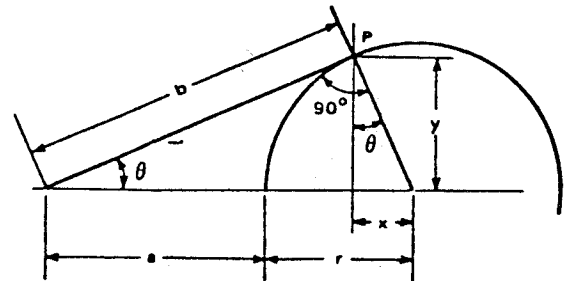

Solution for Finding Points of Tangency with A Circle:

Given: b , c and r , determine x_1 and y_1

$$a = \sqrt{b^2 + c^2} - r$$


$$\sin \theta = \frac{r}{a + r}$$

$$\tan \alpha = \frac{b}{c}$$

$$\gamma = 90^\circ - \theta - \alpha$$

$$e = r \sin \gamma, \text{ then } x_1 = b + e$$

$$d = r \cos \gamma, \text{ then } y_1 = c - d$$

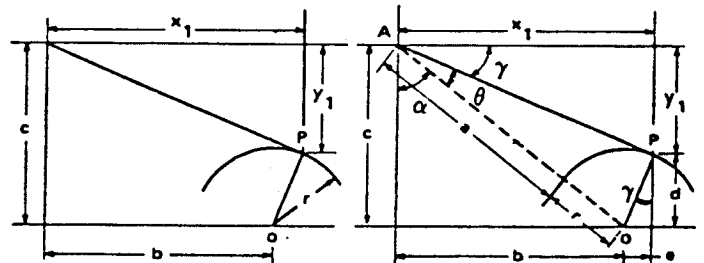

Solution for Finding Points of Tangency with Two Circles:

Given: a , b , r_1 and r_2 , determine x_1 , y_1 , x_2 and y_2

$$c = a^2 + b^2$$

$$\tan \theta = \frac{b}{a}$$


$$\sin \phi = \frac{r_2 - r_1}{c}$$

$$x_1 = r_1 \sin(\theta + \phi)$$

$$y_1 = r_1 \cos(\theta + \phi)$$

$$x_2 = r_2 \sin(\theta + \phi)$$

$$y_2 = b + r_2 \cos(\theta + \phi)$$

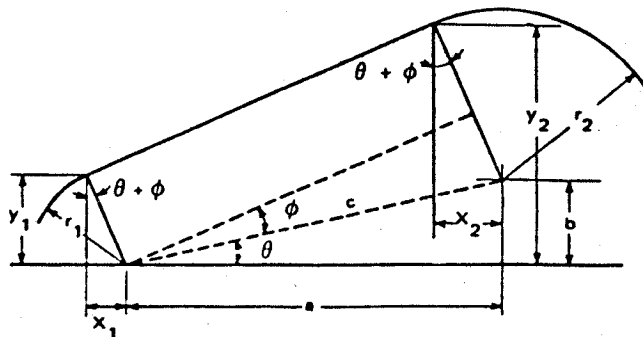

Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

Example:

Find the point of tangency with an arc given: $a = 1.125''$ and $r = .750''$.

Keystrokes:

Display:

[XEQ] [ALPHA] DEG [ALPHA]
 [XEQ] [ALPHA] SIZE [ALPHA] 007
 [XEQ] [ALPHA] POINTS [ALPHA]
 [A]
 1.125 [R/S]
 .75 [R/S]
 [R/S]
 [R/S]
 [R/S]

(set angular mode)
 POINTS OF T.
 a?
 R?
 X=0.3000
 Y=0.6874
 b=1.7185
 THETA=23.5782 (degs)

User Instructions

				SIZE: 007
STEP	INSTRUCTIONS	INPUT	FUNCTION	DISPLAY
1	Key in the program and set angular mode			
2	Initialize the program.		[XEQ] POINTS	POINTS OF T.
3	Determine the case from the drawings.			
4	For the point of tangency with an arc:		[A]	a?
		a	[R/S]	R?
		r	[R/S]	X=(x)
			[R/S] *	Y=(y)
	(optional)		[R/S] *	b=(b)
			[R/S] *	THETA=(θ)
5	For the point of tangency with a circle:		[B]	b?
		b	[R/S]	c?
		c	[R/S]	R?
		r	[R/S]	X1=(x_1)
			[R/S] *	Y1=(y_1)
	(optional)		[R/S] *	a=(a)
			[R/S] *	THETA=(θ)
			[R/S] *	ALPHA=(α)
6	For the points of tangency with two			
	circles:		[C]	a?
		a	[R/S]	b?
		b	[R/S]	R2?
		r ₂	[R/S]	R1?
		r ₁	[R/S]	X1=(x_1)
			[R/S] *	Y1=(y_1)
			[R/S] *	X2=(x_2)
			[R/S] *	Y2=(y_2)
	(optional)		[R/S] *	c=(c)

Program Listings

01♦LBL "POINTS"		50 STO 04	
02 SF 21	Initialize	51 -	
03 SF 27		52 STO 02	
04 "POINTS OF T."		53 LASTX	Calculate x_1 , y_1 , a , θ , α
05 AVIEW		54 LASTX	
06 STOP		55 RCL 02	
07♦LBL A		56 +	
08 "a?"	Tangency with an arc	57 /	
09 PROMPT		58 ASIN	
10 "R?"		59 STO 03	
11 PROMPT	Input a, r	60 90	
12 STO 01		61 -	
13 +		62 CHS	
14 STO 00		63 RCL 00	
15 X \uparrow 2	Calculate x, y, b, θ	64 RCL 01	
16 RCL 01		65 /	
17 X \uparrow 2		66 ATAN	
18 -		67 STO 05	
19 SQRT		68 -	
20 STO 02		69 RCL 04	
21 RCL 01		70 P-R	
22 RCL 00		71 RCL 01	
23 /		72 -	
24 *		73 CHS	
25 LASTX		74 X \langle Y	
26 RCL 01		75 RCL 00	
27 *		76 +	
28 "X"		77 "X1"	
29 XEQ 11		78 XEQ 11	
30 RDN		79 RDN	
31 "Y"		80 "Y1"	
32 XEQ 11		81 XEQ 11	
33 RCL 02		82 RCL 02	
34 "b"		83 "a"	
35 XEQ 11		84 XEQ 11	
36 /		85 RCL 03	
37 ASIN		86 "THETA"	
38 "THETA"		87 XEQ 11	
39 GTO 11		88 RCL 05	
40♦LBL B		89 "ALPHA"	
41 "b?"	Tangency with a circle	90 GTO 11	
42 PROMPT		91♦LBL C	
43 STO 00		92 "a?"	Tangency with two circles
44 "c?"		93 PROMPT	
45 PROMPT	Input b, c, r	94 STO 00	
46 STO 01		95 "b?"	
47 R-P		96 PROMPT	
48 "R?"		97 STO 01	
49 PROMPT		98 R-P	
		99 STO 02	
		100 "R2?"	

Program Listings

101 PROMPT		51	
102 STO 04			
103 "R1?"			
104 PROMPT	Input a, b, r ₁ ,		
105 STO 05	r ₂		
106 -			
107 /			
108 1/X	Calculate x ₁ ,		
109 ASIN	y ₁ , x ₂ , y ₂ , c,		
110 STO 03	θ, φ	60	
111 RCL 01			
112 RCL 00			
113 /			
114 ATAN			
115 STO 00			
116 +			
117 STO 06			
118 RCL 05			
119 P-R			
120 X<>Y		70	
121 "X1"			
122 XEQ 11			
123 X<>Y			
124 "Y1"			
125 XEQ 11			
126 RCL 06			
127 RCL 04			
128 P-R			
129 RCL 01			
130 +		80	
131 X<>Y			
132 "X2"			
133 XEQ 11			
134 X<>Y			
135 "Y2"			
136 XEQ 11			
137 RCL 02			
138 "c"			
139 XEQ 11			
140 RCL 00		90	
141 "THETA"			
142 XEQ 11			
143 RCL 03			
144 "PHI"	Display routine		
145 LBL 11			
146 "f="			
147 ARCL X			
148 AVIEW			
149 END			
		00	

POINTS OF TANGENCY WITH
CIRCLES AND ARCS
PROGRAM REGISTERS NEEDED: 39

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

ROW 1 (1 : 3)



ROW 2 (3 : 4)



ROW 3 (4 : 11)



ROW 4 (12 : 24)



ROW 5 (25 : 32)



ROW 6 (32 : 38)



ROW 7 (38 : 44)



ROW 8 (44 : 54)



ROW 9 (55 : 66)



ROW 10 (67 : 77)



ROW 11 (78 : 83)



ROW 12 (84 : 87)



ROW 13 (88 : 92)



ROW 14 (92 : 100)



ROW 15 (100 : 109)



ROW 16 (110 : 121)



ROW 17 (121 : 127)



ROW 18 (128 : 135)



POINTS OF TANGENCY WITH
CIRCLES AND ARCS

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

ROW 19 (135 : 141)



ROW 20 (141 : 145)



ROW 21 (146 : 149)




LINE-LINE INTERSECTION

This program will calculate the point of intersection of two lines. For each line the user specifies two points, or one point and the angle from horizontal, or one point and the slope. Slope will be converted to angle by the relation $\theta = \tan^{-1}(\text{slope})$. Given two points (x_1, y_1) and (x_2, y_2) on the line, the angle is:

$$\theta = \tan^{-1} \frac{y_2 - y_1}{x_2 - x_1}$$

- (x, y) = Coordinates of point of intersection
- (x_1, y_1) = Coordinates of point on line one
- (x_2, y_2) = Coordinates of point on line two
- θ_1 = Angle from horizontal to line one
- θ_2 = Angle from horizontal to line two



Equations:

$$x = \frac{x_1 \tan \theta_1 - x_2 \tan \theta_2 + y_2 - y_1}{\tan \theta_1 - \tan \theta_2}$$

$$y = y_1 + (x - x_1) \tan \theta_1$$

Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

Example:

Find the point of intersection of two lines, one passing through (10,20) (40,30), and the other through (-10,30) (50,10).

Keystrokes:

[shift] [fix] 4
 [XEQ] [ALPHA] SIZE [ALPHA] 007
 [XEQ] [ALPHA] LINE [ALPHA]
 [A]
 10 [R/S]
 20 [R/S]
 40 [R/S]
 30 [R/S]
 [A]
 10 [CHS] [R/S]
 30 [R/S]
 50 [R/S]
 10 [R/S]
 [R/S]

Display:

(set display mode)
 LINE INTRSEC
 X1 ?
 Y1 ?
 X2 ?
 Y2 ?
 NEXT LINE ?
 X1 ?
 Y1 ?
 X2 ?
 Y2 ?
 X=15.0000
 Y=21.6667

User Instructions

				SIZE: 007
STEP	INSTRUCTIONS	INPUT	FUNCTION	DISPLAY
1	Key in the program and set display mode			
2	Initialize the program.		[XEQ] LINE	LINE #INTRSEC
	LINE-LINE INTERSECTION:			
3a	Input two points on line:		[A]	X1 ?
		x ₁	[R/S]	Y1 ?
		y ₁	[R/S]	X2 ?
		x ₂	[R/S]	Y2 ?
		y ₂	[R/S]	NEXT LINE ?
3b	Or, input one point and the slope, m:		[B]	X ?
		x	[R/S]	Y ?
		y	[R/S]	M ?
		m	[R/S]	NEXT LINE ?
3c	Or, input one point and the angle θ :		[C]	X ?
		x	[R/S]	Y ?
		y	[R/S]	THETA ?
		θ	[R/S]	NEXT LINE ?
3d	Or, for the case where the second line is vertical, input the x coordinate:	x	[D]	Y=(y)
4	Repeat step 3 for the second line.			
5	After the parameters for the second line are input, the intersection coordinates are automatically displayed.		[R/S]	X=(x) Y=(y)
6	For a new case, go to step 2.			

Program Listings

01♦LBL "LINE E"		45 FS?C 00	
02 CF 00	Initialize flags	46 TAN	
03 SF 21		47♦LBL 02	
04 SF 27		48 ISG 00	
05 DEG		49 STO IND	
06 1.006	Store loop control value	00	
07 STO 00		50 "NEXT LINE ?"	Get input for second line
08 "LINE IN TRSEC"		51 ISG 00	
09♦LBL 01		52 GTO 01	
10 AVIEW		53 RCL 01	Calculate x and y (intersect point)
11 STOP		54 RCL 03	
12♦LBL A	Two points on line input routine	55 *	
13 "X1 ?"		56 RCL 04	
14 PROMPT		57 RCL 06	
15 STO IND		58 *	
00	Input x_1, y_1 and x_2, y_2	59 -	
16 ISG 00		60 RCL 05	
17 "Y1 ?"		61 +	
18 PROMPT		62 RCL 02	Calculate x
19 STO IND	Calculate θ	63 -	
00		64 RCL 03	
20 X<>Y		65 RCL 06	
21 "X2 ?"		66 -	
22 PROMPT		67 /	
23 -		68 "X"	
24 X<>Y		69 XEQ 11	
25 "Y2 ?"		70♦LBL D	Calculate y
26 PROMPT		71 RCL 01	
27 -		72 -	
28 /		73 RCL 03	
29 1/X		74 *	
30 GTO 02		75 RCL 02	
31♦LBL C		76 +	
32 SF 00	Input routine for x, y and slope or θ	77 "Y"	
33♦LBL B		78♦LBL 11	Display routine
34 "X ?"		79 "I="	
35 PROMPT		80 ARCL X	
36 STO IND		81 AVIEW	
00		82 END	
37 ISG 00			
38 "Y ?"			
39 PROMPT			
40 STO IND			
00			
41 "M ?"			
42 FS? 00			
43 "THETA ?"			
"			
44 PROMPT			

LINE-LINE INTERSECTION

HEWLETT PACKARD
SOLUTIONS BOOK:
GEOMETRY

PROGRAM REGISTERS NEEDED: 26

ROW 1 (1 : 4)



ROW 2 (4 : 8)



ROW 3 (8 : 12)



ROW 4 (13 : 17)



ROW 5 (17 : 23)



ROW 6 (24 : 31)



ROW 7 (31 : 37)



ROW 8 (37 : 42)



ROW 9 (42 : 46)



ROW 10 (47 : 50)



ROW 11 (50 : 57)



ROW 12 (58 : 69)



ROW 13 (69 : 78)



ROW 14 (79 : 82)



POINTS ON A STRAIGHT LINE

This program calculates the coordinates of equidistant points on a straight line.

Equations:

Point P_i is calculated by

$$x_i = x_1 + (i - 1) H \cos \theta$$


$$y_i = y_1 + (i - 1) H \sin \theta, \quad i = \pm 0, 1, 2, \dots$$

where

$P_1 = (x_1, y_1)$ (the starting point);

θ is the angle of the straight line with the x axis;

H is the distance between consecutive points in the direction of the straight line.

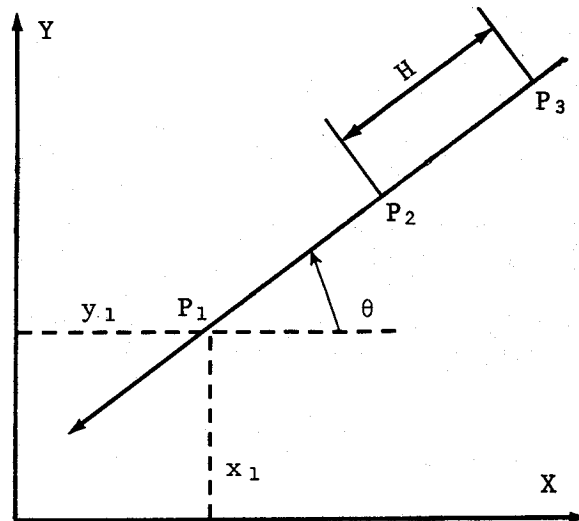

Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

Example:

For the straight line designated by $X_1 = 10$, $Y_1 = 10$, $\theta = -30^\circ$, calculate P_i for $H = 20$ and $i = 1, 2$, and 3 .

Keystrokes:

[USER]
 [XEQ] [ALPHA] SIZE [ALPHA] 005
 [XEQ] [ALPHA] PLINE [ALPHA]

 10 [R/S]
 10 [R/S]
 30 [CHS] [R/S]
 20 [R/S]
 1 [R/S]
 [R/S]
 [R/S] [R/S]
 [R/S]
 [R/S] [R/S]
 [R/S]

Display:

(set USER mode)

 PTS. ON ST. L.
 X1 ?
 Y1 ?
 THETA ?
 H ?
 I ?
 X=10.0000
 Y=10.0000
 X=27.3205
 Y=0.0000
 X=44.6410
 Y=-10.0000

Program Listings

01*LBL "PLI NE"		51	
02 "PTS. ON ST. L."	Initialize		
03 AVIEW			
04 PSE	Input x ₁ , y ₁ , θ, and H		
05 "X1 ?"			
06 PROMPT			
07 STO 02			
08 "Y1 ?"			
09 PROMPT	Input I	60	
10 STO 03			
11 "THETA ? "			
12 PROMPT	Calculate x, y		
13 "H ?"			
14 PROMPT			
15 P-R			
16 STO 00			
17 RDN			
18 STO 01		70	
19*LBL 01			
20 "I ?"			
21 PROMPT			
22 1			
23 -			
24 STO 04			
25 RCL 00			
26 *			
27 RCL 02			
28 +		80	
29 "X"			
30 XEQ 11			
31 RCL 04			
32 RCL 01			
33 *			
34 RCL 03			
35 +			
36 "Y"			
37 XEQ 11			
38 RCL 04		90	
39 2			
40 +			
41 GTO 01			
42*LBL 11			
43 "I="	Display routine		
44 ARCL X			
45 AVIEW			
46 STOP			
47 RTN			
48 .END.		00	

POINTS ON A STRAIGHT LINE

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

PROGRAM REGISTERS NEEDED: 15

ROW 1 (1 - 2)



ROW 2 (2 - 4)



ROW 3 (5 - 9)



ROW 4 (10 - 13)



ROW 5 (13 - 22)



ROW 6 (23 - 32)



ROW 7 (33 - 41)



ROW 8 (42 - 48)



GRID OF POINTS: CALCULATE ALL POINTS

This program calculates the X and Y coordinates of all the points on a grid defined as follows:

a. First direction of a grid:

the angle, θ_1 , with the positive X axis

the algebraic distance between each point, H_1 , in this direction

the total number, N_1 , of points (including the first one)

b. Second direction of the grid:

the angle, θ_2 , with the positive X axis


the algebraic distance between two points, H_2 , in that direction

the total number, N_2 , of points (including the first one)

c. Starting point (noted 1) with coordinates X and Y.

The calculation is incremental from point 1 to point (N_1, N_2) . For each point we find:

The index i , the X_i and Y_i coordinates

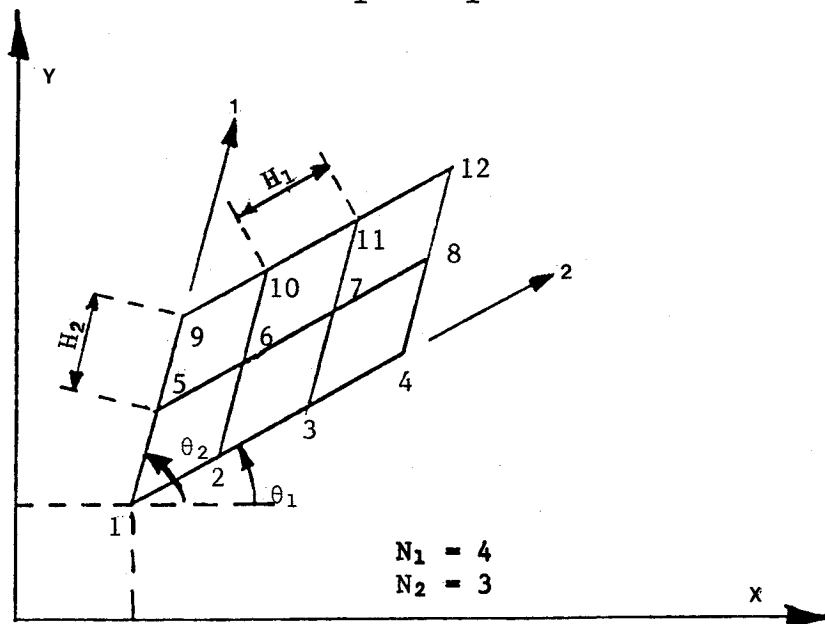

Example:

Find the grid points for:

$$\theta_1 = 0^\circ, H_1 = 10, N_1 = 3, X_1 = 10$$

$$\theta_2 = 90^\circ, H_2 = 20, N_2 = 2, Y_2 = 10$$

Keystrokes:

[USER]

[XEQ] [ALPHA] SIZE [ALPHA] 010

[XEQ] [ALPHA] GRIDALL [ALPHA]

3 [R/S]

2 [R/S]

10 [R/S]

10 [R/S]

10 [R/S]

20 [R/S]

0 [R/S]

90 [R/S]

[R/S]

[R/S]

[R/S]

:

[R/S]

[R/S]

[R/S]

Display:

(set USER mode)

GRID ALL PTS

N1 ?

N2 ?

X1 ?

Y1 ?

H1 ?

H2 ?

THETA 1 ?

THETA 2 ?

X1=10.0000

Y1=10.0000

X2=20.0000

Y2=10.0000

:

X6=30.0000

Y6=30.0000

END

User Instructions

SIZE: 010

STEP	INSTRUCTIONS	INPUT	FUNCTION	DISPLAY
1	Key in the program and set USER mode.		[USER]	
2	Initialize the program.		[XEQ] GRIDALL	GRID ALL PTS
				N1 ?
3	Input the number of points:	N1	[R/S]	N2 ?
		N2	[R/S]	X1 ?
	the origin:	X1	[R/S]	Y1 ?
		Y1	[R/S]	H1 ?
	grid increments:	H1	[R/S]	H2 ?
		H2	[R/S]	THETA 1 ?
	and directions.	θ1	[R/S]	THETA 2 ?
	Calculate the coordinates of the grid	θ2	[R/S]	X1=(x ₁)
	points.		[R/S]	Y1=(y ₁)
			[R/S]	X(i)=(x _i)
			[R/S]	Y(i)=(y _i)
			:	:
			[R/S]	END
4	For another case, go to step 2.			

Program Listings

01*LBL "GRI DALL"		48 STO 05	
02 1	Initialize	49 GTO d	
03 STO 09		50*LBL 01	
04 CF 29		51 1	
05 "GRID AL L PTS"		52 ST+ 09	
06 AVIEW		53 ISG 06	Loop control routine
07 PSE		54 GTO d	
08 "N1 ?"		55 RCL 08	
09 PROMPT		56 STO 06	
10 1		57 ISG 07	
11 -	Input N1, N2, X1, X2, H1, H2 01, 02	58 GTO d	
12 1 E3		59 "END"	
13 /		60 AVIEW	
14 STO 06		61 STOP	
15 STO 08		62*LBL d	
16 "N2 ?"		63 RCL 06	
17 PROMPT		64 INT	
18 1		65 RCL 02	
19 -		66 *	
20 1 E3		67 RCL 04	Calculate X, Y
21 /		68 RCL 07	
22 STO 07		69 INT	
23 "X1 ?"		70 *	
24 PROMPT		71 +	
25 STO 00		72 RCL 00	
26 "Y1 ?"		73 +	
27 PROMPT		74 "X"	
28 STO 01		75 XEQ 12	
29 "H1 ?"		76 RCL 03	
30 PROMPT		77 RCL 06	
31 +		78 INT	
32 "H2 ?"		79 *	
33 PROMPT		80 RCL 05	
34 STO 04		81 RCL 07	
35 "THETA 1 ?"		82 INT	
36 PROMPT	Calculate ΔX 's and ΔY 's	83 *	
37 LASTX		84 +	
38 F-R		85 RCL 01	
39 STO 02		86 +	
40 RDN		87 "Y"	
41 STO 03		88 XEQ 12	
42 "THETA 2 ?"		89 GTO 01	
43 PROMPT		90*LBL 12	
44 RCL 04		91 FIX 0	
45 F-R		92 ARCL 09	Display routine
46 STO 04		93 "F="	
47 RDN		94 FIX 4	
		95 ARCL X	
		96 AVIEW	
		97 STOP	
		98 RTN	

GRID OF POINTS:
CALCULATE ALL POINTS
PROGRAM REGISTERS NEEDED: 28

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

ROW 1 (1 - 3)



ROW 2 (4 - 5)



ROW 3 (5 - 12)



ROW 4 (12 - 19)



ROW 5 (20 - 26)



ROW 6 (26 - 31)



ROW 7 (32 - 35)



ROW 8 (35 - 42)



ROW 9 (42 - 48)



ROW 10 (49 - 55)



ROW 11 (56 - 62)



ROW 12 (62 - 74)



ROW 13 (74 - 84)



ROW 14 (85 - 92)



ROW 15 (92 - 99)



ROW 16 (99 - 99)



GRID OF POINTS: CALCULATE DISCRETE POINTS

This program calculates the cartesian coordinates of specified points of a grid defined as follows:

a. First direction:

the angle θ_1 (related to positive X axis)

the distance between each point, H_1 , in this direction

b. Second direction:

the angle θ_2

the distance H_2


c. Starting point (origin of the grid), X_{11} and Y_{11} .

Formulas:

$$X_{ij} = X_1 + (j-1) \Delta X_1 + (i-1) \Delta X_2$$

$$Y_{ij} = Y_1 + (j-1) \Delta Y_1 + (i-1) \Delta Y_2$$

where $\Delta X_1 = H_1 \cos \theta_1$
 $\Delta Y_1 = H_1 \sin \theta_1$
 $\Delta X_2 = H_2 \cos \theta_2$
 $\Delta Y_2 = H_2 \sin \theta_2$

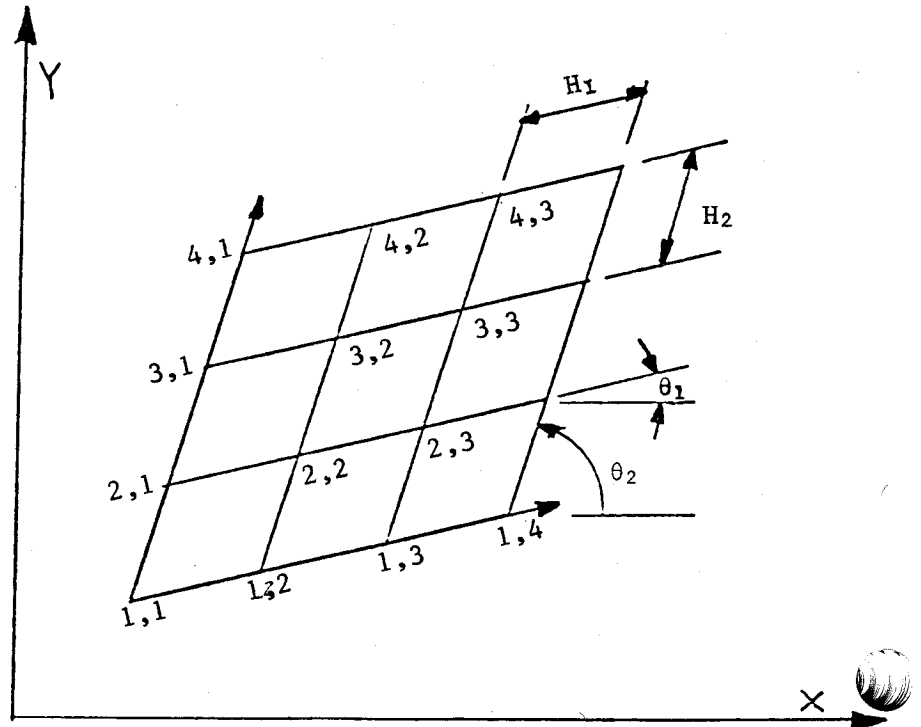

Example:

For a grid with its origin at (1,1), $H_1 = 2$, $H_2 = 3$, $\theta_1 = 30$, and $\theta_2 = 90^\circ$, find the cartesian coordinates for the following grid coordinates: (1,1), (2.5,4).

Keystrokes:

```
[USER]
[XEQ] [ALPHA] SIZE [ALPHA] 008
[XEQ] [ALPHA] GRIDISC [ALPHA]

1 [R/S]
1 [R/S]
2 [R/S]
3 [R/S]
30 [R/S]
90 [R/S]
1 [R/S]
1 [R/S]
[R/S]
[A]
2.5 [R/S]
4 [R/S]
[R/S]
```

Display:

```
(set USER mode)

GRID DIS. PTS.
X1 ?
Y1 ?
H1 ?
H2 ?
THETA 1 ?
THETA 2 ?
I?
J?
X=1.0000
Y=1.0000
I?
J?
X=6.1962
Y=8.5000
```


Program Listings

<pre> 01 LBL "GRI DISC" 02 "GRID DI S. PTS." 03 AVIEW 04 PSE 05 "X1 ?" 06 PROMPT 07 STO 00 08 "Y1 ?" 09 PROMPT 10 STO 01 11 "H1 ?" 12 PROMPT 13 + 14 "H2 ?" 15 PROMPT 16 STO 04 17 "THETA 1 ?" 18 PROMPT 19 LASTX 20 P-R 21 STO 02 22 RDN 23 STO 03 24 "THETA 2 ?" 25 PROMPT 26 RCL 04 27 P-R 28 STO 04 29 RDN 30 STO 05 31 LBL A 32 "I?" 33 PROMPT 34 1 35 - 36 STO 06 37 "J?" 38 PROMPT 39 1 40 - 41 STO 07 42 RCL 02 43 * 44 RCL 04 45 RCL 06 46 * 47 + </pre>	<p>Initialize</p> <p>Input x₁, y₂, H₁, H₂, and calculate θ_x's and θ_y's</p>	<pre> 48 RCL 00 49 + 50 "X" 51 XEQ 11 52 RCL 03 53 RCL 07 54 * 55 RCL 05 56 RCL 06 57 * 58 + 59 RCL 01 60 + 61 "Y" 62 LBL 11 63 "f=" 64 ARCL X 65 AVIEW 66 STOP 67 RTN 68 .END. </pre>
		<p>Display routine</p>
		80
		90
		00

REGISTERS, STATUS, FLAGS, ASSIGNMENTS

DATA REGISTERS			STATUS			
00	X ₁	50	SIZE <u>008</u> TOT. REG. <u>27</u> USER MODE			
	Y ₁		ENG _____ FIX _____ SCI _____ ON <u>X</u> OFF _____			
	ΔX ₁		DEG <u>X</u> RAD _____ GRAD _____			
	ΔY ₁		FLAGS			
05	ΔX ₂	55	#	INIT S/C	SET INDICATES	CLEAR INDICATES
	I-1					
	J-1					
10		60				
15		65				
20		70				
25		75				
30		80				
35		85				
			ASSIGNMENTS			
			FUNCTION	KEY	FUNCTION	KEY
40		90				
45		95				

GRID OF POINTS:
CALCULATE DISCRETE POINTS
PROGRAM REGISTERS NEEDED: 20

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

ROW 1 (1 - 2)



ROW 2 (2 - 2)



ROW 3 (3 - 8)



ROW 4 (8 - 14)



ROW 5 (14 - 17)



ROW 6 (17 - 24)



ROW 7 (24 - 32)



ROW 8 (32 - 41)



ROW 9 (42 - 51)



ROW 10 (52 - 63)




ROW 11 (63 - 68)




TANGENT CIRCLE TO TWO STRAIGHT LINES WITH A GIVEN RADIUS

This program calculates the X and Y coordinates of the centers of the four circles with a given radius, R, which are tangent to two given lines.

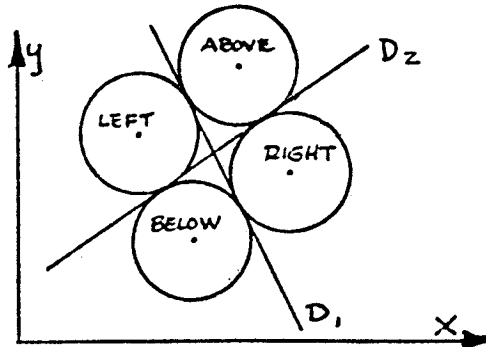

The straight lines are each defined by one point and an angle which follows the convention below:

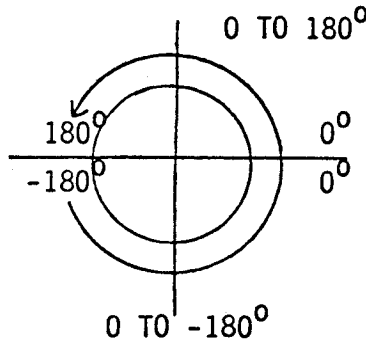

The straight lines are first shifted by R. The calculation is then one of the intersection of two straight lines.

Formulas used:

$$X = \frac{(Y_2 - Y_1) \cos \theta_1 \cos \theta_2 + X_1 \sin \theta_1 \cos \theta_2 - X_2 \sin \theta_2 \cos \theta_1}{\sin(\theta_1 - \theta_2)}$$

$$Y = Y_1 + (X - X_1) \tan \theta_1, \quad |\theta| \geq 90^\circ$$

$$Y = Y_2 + (X - X_2) \tan \theta_2, \quad |\theta| < 90^\circ$$

Reference: HP-67/97 "Geometry" Users' Library Solutions Book.

Example:

Find the tangent circle for:

$$D_1 = [10, 20, 30^\circ] \quad D_2 = [-20, 30, -60^\circ] \quad R = 10$$

Executing the program four times will yield:

	X	Y
Above (A)	-4.5096	23.1699
Below (B)	-11.8301	-4.1506
Left (L)	-21.8301	13.1699
Right (R)	5.4904	5.8494

Keystrokes:

[XEQ] [ALPHA] SIZE [ALPHA] 009

[XEQ] [ALPHA] TANGENT [ALPHA]

10 [R/S]

A [R/S]

10 [R/S]

20 [R/S]

30 [R/S]

20 [CHS] [R/S]

30 [R/S]

60 [CHS] [R/S]

[R/S]

Display:

TANGENT CIRC.

R?

WHERE (L,R,A,B) ?

X?

Y?

THETA?

X?

Y?

THETA ?

X=-4.5096

Y=23.1699

Program Listings

01♦LBL "TAN GENT"		48♦LBL B	
02 CF 01	Initialize	49 RCL 08	
03 CF 02		50 GTO 01	
04 CF 03		51♦LBL C	
05 CF 04		52 RCL 08	
06 "TANGENT CIRC."		53 CHS	
07 AVIEW		54♦LBL 01	
08 PSE		55 X<>Y	
09 "R?"		56 FS?C 01	Calculate X_1 , Y_1
10 PROMPT	Input R	57 GTO 02	
11 STO 08		58 STO 03	
12 "WHERE<L ,R,A,B>?"		59 X<>Y	
13 AON	Input position	60 P-R	
14 PROMPT		61 X<>Y	
15 AOFF		62 RDN	
16 ASTO Y		63 +	
17 "A"		64 STO 02	
18 ASTO X		65 RDN	
19 X=Y?		66 X<>Y	
20 SF 02		67 -	
21 "B"		68 STO 01	
22 ASTO X		69 SF 01	
23 X=Y?		70 GTO 07	
24 SF 03		71♦LBL 02	Calculate X, Y
25 "L"		72 STO 06	
26 ASTO X		73 X<>Y	
27 X=Y?		74 P-R	
28 SF 04		75 X<>Y	
29♦LBL 07		76 RDN	
30 "X?"	Input X, Y, θ	77 +	
31 PROMPT		78 STO 05	
32 "Y?"		79 RDN	
33 PROMPT		80 X<>Y	
34 "THETA ?"		81 -	
35 PROMPT	Set up calculations	82 STO 04	Calculate X
36 FS? 02		83 RCL 05	
37 GTO B		84 RCL 02	
38 FS? 03		85 -	
39 GTO C		86 RCL 03	
40 FS? 04		87 COS	
41 GTO D		88 STO 07	
42 X<0?		89 *	
43 GTO B		90 RCL 06	
44 GTO C		91 COS	
45♦LBL D		92 STO 08	
46 X<0?		93 *	
47 GTO C		94 RCL 01	
		95 RCL 08	
		96 *	
		97 RCL 03	
		98 SIN	

Program Listings

99 *		51	
100 +			
101 RCL 04			
102 RCL 07			
103 *			
104 RCL 06			
105 SIN			
106 *			
107 -			
108 RCL 03		60	
109 RCL 06			
110 -			
111 SIN			
112 /			
113 STO 07			
114 "X"			
115 XEQ 11			
116 RCL 03			
117 ABS			
118 90			
119 X>Y?	Calculate Y	70	
120 GTO 03			
121 RCL 07			
122 RCL 01			
123 -			
124 RCL 03			
125 TAN			
126 *			
127 RCL 02			
128 GTO 04			
129♦LBL 03		80	
130 RCL 07			
131 RCL 04			
132 -			
133 RCL 06			
134 TAN			
135 *			
136 RCL 05			
137♦LBL 04			
138 +			
139 "Y"		90	
140♦LBL 11			
141 "F="			
142 ARCL X	Display routine		
143 AVIEW			
144 STOP			
145 RTN			
146 .END.			
50		00	

REGISTERS, STATUS, FLAGS, ASSIGNMENTS

DATA REGISTERS			STATUS			
00		50	SIZE <u>009</u> TOT. REG. <u>44</u> USER MODE ENG _____ FIX _____ SCI _____ ON _____ OFF <u>X</u> DEG <u>X</u> RAD _____ GRAD _____			
	X' ₁		FLAGS # INIT SET INDICATES CLEAR INDICATES S/C			
	Y' ₁					
	θ_1					
	X' ₂					
05	Y' ₂	55	01		1st pass, input X ₁	2nd pass, input X ₂ , ...
	θ_2		02		circle above	
	cos θ_1 , X		03		circle below	
	R, cos θ_2		04		circle left	
10		60				
15		65				
20		70				
25		75				
30		80				
35		85				
			ASSIGNMENTS			
			FUNCTION		KEY	
40		90				
45		95				

TANGENT CIRCLE TO TWO STRAIGHT
LINES WITH A GIVEN RADIUS
PROGRAM REGISTERS NEEDED: 36

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

ROW 1 (1 - 2)



ROW 2 (3 - 6)



ROW 3 (6 - 10)



ROW 4 (11 - 12)



ROW 5 (12 - 18)



ROW 6 (19 - 26)



ROW 7 (26 - 33)



ROW 8 (34 - 37)



ROW 9 (37 - 43)



ROW 10 (43 - 48)



ROW 11 (49 - 57)



ROW 12 (58 - 69)



ROW 13 (70 - 81)



ROW 14 (82 - 94)



ROW 15 (95 - 107)



ROW 16 (108 - 117)



ROW 17 (118 - 128)



ROW 18 (128 - 139)



TANGENT CIRCLE TO TWO STRAIGHT
LINES WITH A GIVEN RADIUS

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

ROW 19 (140 - 146)



DISTANCE BETWEEN LINES IN SPACE

Given two lines, each defined by two points, this program calculates the shortest distance between the two lines. (This program was originally written to determine the clearance between electrical distribution circuits and guy wires or supporting structures).

The program takes lines defined by the two-point form,

$$\frac{x - x_1}{x_1' - x_1} = \frac{y - y_1}{y_1' - y_1} = \frac{z - z_1}{z_1' - z_1}$$

changes them to the point-direction form,

$$\frac{x - x_1}{a} = \frac{y - y_1}{b} = \frac{z - z_1}{c}$$

and the shortest distance (D) is calculated by:

$$D = \frac{\begin{vmatrix} x_2 - x_1 & y_2 - y_1 & z_2 - z_1 \\ a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \end{vmatrix}}{\sqrt{\begin{vmatrix} b_1 & c_1 \\ b_2 & c_2 \end{vmatrix}^2 + \begin{vmatrix} c_1 & a_1 \\ c_2 & a_2 \end{vmatrix}^2 + \begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix}^2}}$$

Reference: Handbook of Tables for Mathematics, Third Edition, Samuel M. Selby, Published by The Chemical Rubber Co., 1967, page 509.

Example:

Given two lines in three-dimensional space:

Line #1 defined by points $(X_1, Y_1, Z_1) = (30, 14, 10)$ and $(X'_1, Y'_1, Z'_1) = (0, 46, 10)$;

Line #2 defined by points $(X, Y, Z) = (124, 50, -30)$ and $(X'_2, Y'_2, Z'_2) = (0, 36, 16)$.

Calculate the shortest distance between the two lines.

Keystrokes:

Display:

[XEQ] [ALPHA] SIZE [ALPHA] 014

[XEQ] [ALPHA] DIST [ALPHA]

DIST. B. LINES

X1 ?

30 [R/S]

Y1 ?

14 [R/S]

Z1 ?

10 [R/S]

X1-PRIME ?

0 [R/S]

Y1-PRIME ?

46 [R/S]

Z1-PRIME ?

10 [R/S]

X2 ?

124 [R/S]

Y2 ?

50 [R/S]

Z2 ?

30 [CHS] [R/S]

X2-PRIME ?

0 [R/S]

Y2-PRIME ?

36 [R/S]

Z2-PRIME ?

16 [R/S]

D=2.5940

Program Listings

01♦LBL "DIS T"		50 RCL 13	
02 "DIST. B . LINES"	Initialize	51 RCL 05	
03 RVIEW		52 RCL 07	
04 2.2		53 RCL 11	
05 STO 00		54 XEQ 14	
06 1.002		55 RCL 05	
07 STO 01		56 X↑2	
08 CF 29		57 RCL 03	Calculate D
09 FIX 0		58 X↑2	
10♦LBL 02		59 +	
11 "X"		60 RCL 04	
12 XEQ 12	Input data	61 X↑2	
13 "Y"		62 +	
14 XEQ 12		63 SQRT	
15 "Z"		64 1/X	
16 XEQ 12		65 RCL 08	
17 "X"		66 RCL 04	
18 XEQ 13		67 *	
19 "Y"		68 RCL 09	
20 XEQ 13		69 RCL 05	
21 "Z"		70 *	
22 XEQ 13		71 +	
23 ISG 01		72 RCL 10	
24 GTO 02		73 RCL 03	
25 RCL 08		74 *	
26 ST- 11		75 +	
27 RCL 09		76 *	
28 ST- 12	Calculate $a_i,$ $b_i, c_i, \Delta X, \Delta Y,$ ΔZ	77 FIX 4	
29 RCL 10		78 "D="	
30 ST- 13		79 ARCL X	
31 RCL 02		80 RVIEW	
32 ST- 05		81 STOP	
33 ST- 08		82♦LBL 13	
34 RCL 03		83 ARCL 01	
35 ST- 06		84 "F-PRIME ?"	Input prompting routine
36 ST- 09		85 GTO 15	
37 RCL 04		86♦LBL 12	
38 ST- 07		87 ARCL 01	
39 ST- 10		88 "F ?"	
40 RCL 11		89♦LBL 15	
41 RCL 06		90 PROMPT	
42 RCL 05	Calculate (A-B), (B-C) (C-A)	91 STO IND	
43 RCL 12		00	
44 XEQ 14		92 ISG 00	
45 RCL 12		93 RTN	
46 RCL 07		94♦LBL 14	
47 RCL 06		95 *	
48 RCL 13		96 STO IND	Calculate 2x2 matrix
49 XEQ 14		01	
		97 RDN	

DISTANCE BETWEEN
LINES IN SPACE
PROGRAM REGISTERS NEEDED: 29

HEWLETT PACKARD
SOLUTION BOOK:
GEOMETRY

ROW 1 (1 - 2)



ROW 2 (2 - 4)



ROW 3 (4 - 10)



ROW 4 (11 - 16)



ROW 5 (16 - 21)



ROW 6 (21 - 28)



ROW 7 (28 - 36)



ROW 8 (36 - 44)



ROW 9 (45 - 54)



ROW 10 (54 - 66)



ROW 11 (67 - 78)



ROW 12 (78 - 84)



ROW 13 (84 - 88)



ROW 14 (88 - 95)



ROW 15 (96 - 102)



ROW 16 (102 - 102)



Hewlett-Packard Software

In terms of power and flexibility, the problem-solving potential of the HP-41 programmable calculator is nearly limitless. And in order to see the practical side of this potential, HP has different types of software to help save you time and programming effort. Every one of our software solutions has been carefully selected to effectively increase your problem-solving potential. Chances are, we already have the solutions you're looking for.

Application Pacs

To increase the versatility of your HP-41, HP has an extensive library of "Application Pacs". These programs transform your HP-41 into a specialized calculator in seconds. Included in these pacs are detailed manuals with examples, miniature plug-in Application Modules, and keyboard overlays. Every Application Pac has been designed to extend the capabilities of the HP-41.

You can choose from:

Aviation (Pre-Flight Only) 00041-15018
Clinical Lab 00041-15024
Circuit Analysis 00041-15024
Financial Decisions 00041-15004
Mathematics 00041-15003
Structural Analysis 00041-15021
Surveying 00041-15005
Securities 00041-15026

Statistics 00041-15002
Stress Analysis 00041-15027
Games 00041-15022
Home Management 00041-15023
Machine Design 00041-15020
Navigation 00041-15017
Real Estate 00041-15016
Thermal and Transport Science 00041-15019
Petroleum Fluids 00041-15039

Users' Library

The Users' Library provides the best programs from contributors and makes them available to you. By subscribing to the HP-41 Users' Library you'll have at your fingertips literally hundreds of different programs from many different application areas.

*Users' Library Solutions Books

Hewlett-Packard offers a wide selection of Solutions Books complete with user instructions, examples, and listings. These solution books will complement our other software offerings and provide you with a valuable tool for program solutions.

You can choose from:

Business Stat/Marketing/Sales 00041-90094
Home Construction Estimating 00041-90096
Lending, Saving and Leasing 00041-90086
Real Estate 00041-90136
Small Business 00041-90137
Geometry 00041-90084
High-Level Math 00041-90083
Test Statistics 00041-90082
Antennas 00041-90093
Chemical Engineering 00041-90100
Control Systems 00041-90092
Electrical Engineering 00041-90088
Fluid Dynamics and Hydraulics 00041-90139
Games II 00041-90443

Civil Engineering 00041-90089
Heating, Ventilating & Air Conditioning 00041-90140
Mechanical Engineering 00041-90090
Solar Engineering 00041-90138
Calendars 00041-90145
Cardiac/Pulmonary 00041-90097
Chemistry 00041-90102
Games 00041-90099
Optometry I (General) 00041-90143
Optometry II (Contact Lens) 00041-90144
Physics 00041-90142
Surveying 00041-90141
Time Module Solutions 00041-90395

*Some books require additional memory modules to accommodate all programs.

GEOMETRY

SINE PLATE SOLUTIONS
V NOTCHES AND LONG RADII
INTERNAL AND EXTERNAL TAPERS
POINTS OF TANGENCY WITH CIRCLES AND ARCS
LINE-LINE INTERSECTION
POINTS ON A STRAIGHT LINE
GRID OF POINTS: CALCULATE ALL POINTS
GRID OF POINTS: CALCULATE DISCRETE POINTS
TANGENT CIRCLE TO TWO STRAIGHT LINES WITH A GIVEN RADIUS
DISTANCE BETWEEN LINES IN SPACE

